


CUBE/vCUBE/MediaProxy Performance and Sizing Guidelines for IOS-XE based platforms

(C8200, C8300, ISR1100, ISR4K, ASR1K, CSR1K, C8KV)

Hussain Ali, CCIE# 38068 (Voice, Collaboration)
Technical Marketing Engineer

CUBE (Enterprise) Product Portfolio [Not to Scale]

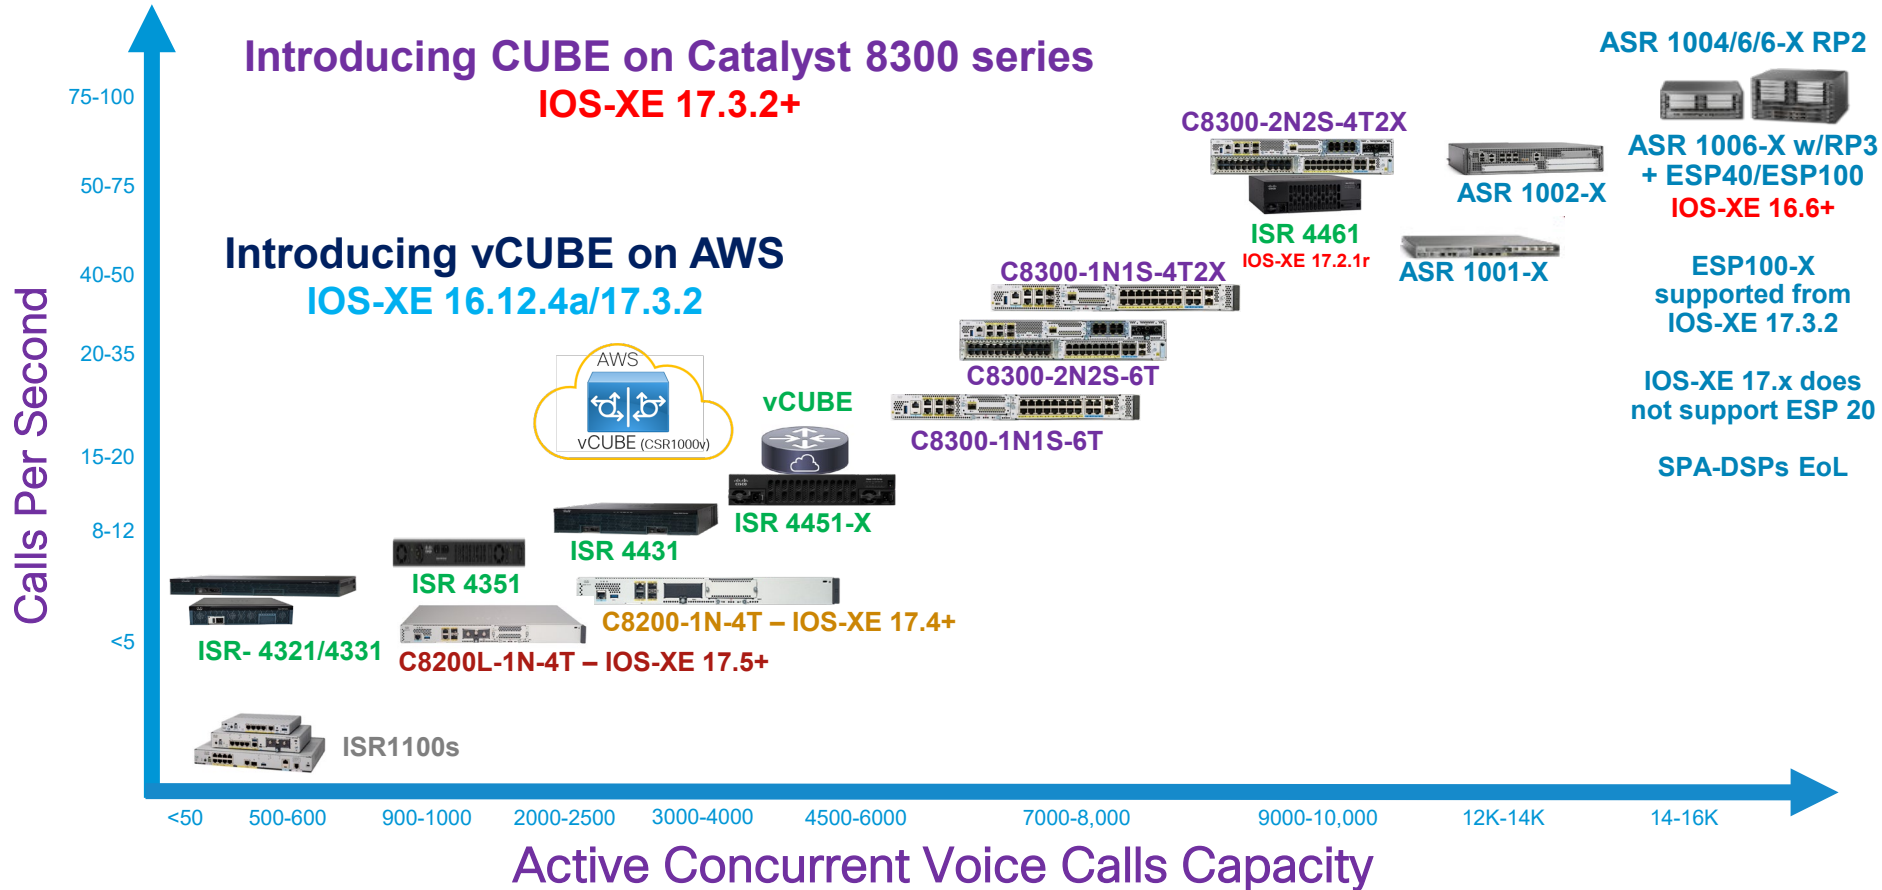

CUBE Software Release Mapping

CUBE Version	Initial IOS-XE Release for this CUBE version and Release date		Subsequent IOS-XE Release for this CUBE version
12.0.0	16.7.1	Nov 2017	16.7.2 – 16.7.3
12.1.0	16.8.1	March 2018	16.8.2 – 16.8.3
12.1.0	16.9.1	July 2018	16.9.2 – 16.9.6 – 16.9.7
12.5.0	16.10.1a	Nov 2018	16.10.2 – 16.10.3
12.6.0	16.11.1a	March 2019	16.11.1a
12.7.0	16.12.1c	July 2019	16.12.1a – 16.12.4 – 16.12.5
12.7.1	17.1.1	Nov 2019	-
12.8.0	17.2.1r	March 2020	17.2.2 – 17.2.3
14.0	17.3.1a	July 2020	-
14.1	17.3.2	Oct 2020	17.3.3
14.2	17.4.1a	Nov 2020	17.4.1b
14.3	17.5.1a	March 2021	-
14.4	17.6.1	July 2021	
TBD	17.7.1	Nov 2021	

Smart Licensing Mandatory

CUBE / vCUBE / MediaProxy Performance and Sizing

Sizing CUBE Enterprise On- Prem deployments

NOTE : Sizing information is only intended as a guideline. Actual session count will vary based on the number of features enabled, along with CUBE and the IOS-XE version being used.

Testing Methodology

Testing Benchmark guidelines

- Simple call flows (14 SIP messages per call), for example:
 - Basic Collaboration IP Telephony Calls (IP Phone registered to UCM making a PSTN call via a SIP trunk to CUBE)
 - Inbound IVR sessions for Contact Center
- Complex Call flows (40 SIP messages per call), for example:
 - UCCE Inbound Comprehensive Transfer flow
 - REFER based transfers
- Platform is tested with a constant call presentation rate - the presented CPS value - with one type of call flow. Call Hold Time (CHT) is set for 180 seconds
- CPS is the maximum *sustainable average presentation* rate. Higher instantaneous presentation rates are possible, but this is not tested.
- Tests focus on the number of successful simultaneous or concurrent active call handling at around 70% CPU and memory utilization¹. Buffer allows for other features that might be configured / required in IOS-XE
- All CUBE platforms are tested with static IP routing configured for the next hop

1 For an ISR4461, starting IOS-XE 17.3.2 or later (VoIP Trace on by default), testing benchmark is at 80% memory utilization.

General Guidelines

CUBE Sizing Guidelines

- All sizing information is based on platforms with the following memory configurations. Using a different memory configuration may result in different sizing limits.
 - 16GB of control plane (CP) memory for C8300-2N2S-4T2X
 - 8GB of CP memory for C8300 (1N1S-4T2X, 2N2S-6T, and 1N1S-6T), C8200-1N-4T
 - 16GB of memory for ASR1K series - 8 GB (Control Plane memory) for ISR4400 series
 - 4 GB for ISR4300 series and C8200L-1N-4T
- Starting IOS-XE 17.4.1, CSR1000v (vCUBE) has been rebranded as follows with the corresponding minimum vRAM required:
 - CSR1K 1vCPU -> C8000V-S [4GB vRAM required]
 - CSR1K 2vCPU -> C8000V-M [5GB vRAM required] (Alternatively, [4GB may be used if booting from component install.](#))
 - CSR1K 4 vCPU -> C8000V-L [8GB vRAM required]
- Session count (end to end calls through CUBE) is dependent on the amount of memory in the platform. Numbers listed in the datasheet and in this document are based on above memory requirements being satisfied.
- CUBE + IOS based S/W MTP co-location: 1 S/W MTP session on the platform = 1 CUBE IPT session, when specific data tables are not available, and not to exceed total CUBE Collab numbers combined

CUBE Sizing Guidelines

- CUBE HA has less than 5% impact on number of sessions under full load
- Complex call flows (Cisco UCCE) can reduce CPS and session count. **With IOS-XE 16.12+, there is significant performance gain for UCCE call flows**
- SRTP with SIP TLS : Numbers will vary based on crypto algorithm and codec used
- **SRTP pass-thru session count and CPS same as RTP-RTP call flows**
- SIP Header manipulation through SIP profiles has less than 5% impact on number of sessions. Impact of SDP manipulation will be slightly higher compared to SIP headers. For example, 6% for changing the codec order in the m-lines
- Media forking for call recording can have a 50% impact on IPT session count regardless of the call type (IPT or UCCE) being recorded on CUBE Enterprise. This includes SIPREC, CUBE ORA with Cisco MediaSense, and CUCM NBR.
- CUBE Media Proxy **cannot** be co-located with CUBE Enterprise
- Performance numbers will be published for long lived (July) releases. [16.12, 17.3, etc]

Call Admission Control (CAC)

- Call processing capacity for any CUBE instance will be influenced by several considerations, including software version, features configured and the platform itself
- To ensure that calls continue to be processed reliably, configure Call Admission Control as follows to reject calls when use of system resources exceeds 80%¹. Refer to the [CUBE Configuration Guide](#) for further details

```
enable
conf t
  call threshold global cpu-avg low 75 high 80
  call threshold global total-mem low 75 high 80
  call treatment on
end
```



- `show call active total-calls` lists the total number of concurrent calls on a CUBE platform

¹ For an ISR4461, starting IOS-XE 17.3.2 or later, testing benchmark is at 80% memory utilization. Configure the memory threshold CAC accordingly.

```
call threshold global total-mem low 80 high 85
```

Collab Calls - Basic IP Telephony Audio Calls

CUBE IP Telephony (Collab) Session Capacity Summary

Platform <small>¹CSR1Kv - Based on tests using Cisco UCS[®] C240 host with Intel[®] Xeon[®] 6132 2.60GHz processors running VMware ESXi 6.0.</small>	CUBE SIP-SIP Audio Sessions (Flow-thru)	Session Count IOS-XE 16.12+	Sustainable CPS
	IOS-XE 16.6 or earlier	RTP(G711)-RTP(G711)	IOS-XE 16.12+
1100 series (Default DRAM)	N/A	500	5
4321	100	 500	4
4331	500	1000	10
4351	1000	2000	13
4431	3000	3000	15
4451	6000	6000	40
4461	N/A	10000 (IOS-XE 17.2.1r+)	55
C8200L-1N-4T (4 GB)	N/A	1500 (IOS-XE 17.5.1+)	9
C8200-1N-4T (8 GB)	N/A	2500 (IOS-XE 17.4.1a+)	14
C8300-1N1S-6T (8 GB)	N/A	7000 (17.3.2)	40
C8300-2N2S-6T (8 GB)	N/A	7500 (17.3.2)	42
C8300-1N1S-4T2X (8 GB)	N/A	8000 (17.3.2)	45
C8300-2N2S-4T2X (16 GB)	N/A	10000 (17.3.2)	55
C8000V-S/CSR1Kv - 1 vCPU ¹ (4 GB)	900	 1000	5
C8000V-M/CSR1Kv - 2 vCPU ¹ (4 GB)	900	3000	20
C8000V-L/CSR1Kv - 4 vCPU ¹ (8 GB)	3250	6000	30

CUBE IP Telephony (Collab) Session Capacity Summary

Platform <small>¹CSR1Kv - Based on tests using Cisco UCS[®] C240 host with Intel[®] Xeon[®] 6132 2.60GHz processors running VMware ESXi 6.0.</small>	CUBE SIP-SIP Audio Sessions (Flow-thru) IOS-XE 16.6 or earlier	Session Count IOS-XE 16.12+ RTP(G711)-RTP(G711)	Sustainable CPS IOS-XE 16.12+
ASR1001-X	12000	12000	50
ASR1002-X	14000	14000	55
ASR1006-X RP3 ESP40/ESP100	16000	16000	65
ASR1004/6/6-X RP2/ESP40	16000	16000	70

Collab Calls - Encrypted Audio Calls

- SRTP-RTP
- SRTP-SRTP

CUBE Encrypted IPT Session Capacity (IOS-XE 16.12+)

Platform	Session Capacity (IOS-XE 16.12+) RTP(G711)-RTP(G711)	Impact of sRTP to IPT	Encrypted Audio calls w/ SHA1_80 sRTP(G711)-RTP(G711)	CPS
1100 series (Default DRAM)	500	40%	300	2
4321 (4 GB)	500	40%	300	1
4331 (4 GB)	1000	40%	600	3
4351 (4 GB)	2000	62.5%	750	4
4431 (8 GB)	3000	75%	750	4
4451 (8 GB)	6000	65%	2100 (16.12.2)	11
4461 (8 GB)	10000 (17.2.1r)	46%	5400 (17.3.1)	30
C8200L-1N-4T (4 GB)	1500 (17.5.1)	73%	400 (17.5.1)	3
C8200-1N-4T (8 GB)	2500 (17.4.1)	74%	650 (17.4.1)	4
C8300-1N1S-6T (8 GB)	7000 (17.3.2)	77%	1600 (17.3.2)	9
C8300-2N2S-6T (8 GB)	7500 (17.3.2)	76%	1800 (17.3.2)	10
C8300-1N1S-4T2X (8 GB)	8000 (17.3.2)	74%	2100 (17.3.2)	12
C8300-2N2S-4T2X (16 GB)	10000 (17.3.2)	57%	4300 (17.3.2)	24
C8000V-S/CSR1Kv - 1 vCPU ¹ (4 GB)	1000	70%	300	1
C8000V-M/CSR1Kv - 2 vCPU ¹ (4 GB)	3000	67%	1000	6
C8000V-L/CSR1Kv - 4 vCPU ¹ (8 GB)	6000	82%	1080	6

¹CSR1Kv - Based on tests using Cisco UCS * C240 host with Intel * Xeon
* 6132 2.60GHz processors running VMware ESXi 6.0.

CUBE Encrypted IPT Session Capacity (IOS-XE 16.12+)

Platform <small>¹CSR1Kv - Based on tests using Cisco UCS [®] C240 host with Intel [®] Xeon [®] 6132 2.60GHz processors running VMware ESXi 6.0.</small>	Session Capacity (IOS-XE 16.12+) RTP(G711)-RTP(G711)	Impact of sRTP to IPT	Encrypted Audio calls w/ SHA1_80 sRTP(G711)-RTP(G711)	CPS
ASR1001-X (16 GB)	12000	79%	2700	13
ASR1002-X (16 GB)	14000	55%	6500	36
ASR1004/6/6-X RP2/ESP40 (16 GB)	16000	78%	3500	20

CUBE Encrypted IPT Session Capacity (IOS-XE 16.12+)

Platform	Session Capacity (IOS-XE 16.12+) RTP(G711)-RTP(G711)	Impact of sRTP to IPT	Encrypted Audio calls w/ GCM128 sRTP(G711)-RTP(G711)	CPS
1100 series (Default DRAM)	500	40%	300	2
4321 (4 GB)	500	40%	300	1
4331 (4 GB)	1000	40%	600	3
4351 (4 GB)	2000	62.5%	750	4
4431 (8 GB)	3000	75%	750	4
4451 (8 GB)	6000	65%	2100 (16.12.2)	11
4461 (8 GB)	10000 (17.2.1r)	46%	5400 (17.3.1)	30
C8200L-1N-4T (4 GB)	1500 (17.5.1)	67%	500 (17.5.1)	3
C8200-1N-4T (8 GB)	2500 (17.4.1)	66%	850 (17.4.1)	5
C8300-1N1S-6T (8 GB)	7000 (17.3.2)	71.5%	2000 (17.3.2)	11
C8300-2N2S-6T (8 GB)	7500 (17.3.2)	72%	2100 (17.3.2)	12
C8300-1N1S-4T2X (8 GB)	8000 (17.3.2)	69%	2500 (17.3.2)	14
C8300-2N2S-4T2X (16 GB)	10000 (17.3.2)	50%	5000 (17.3.2)	28
C8000V-S/CSR1Kv - 1 vCPU ¹ (4 GB)	1000	70%	300	1
C8000V-M/CSR1Kv - 2 vCPU ¹ (4 GB)	3000	67%	1000	6
C8000V-L/CSR1Kv - 4 vCPU ¹ (8 GB)	6000	82%	1080	6

¹CSR1Kv - Based on tests using Cisco UCS * C240 host with Intel * Xeon
* 6132 2.60GHz processors running VMware ESXi 6.0.

CUBE Encrypted IPT Session Capacity (IOS-XE 16.12+)

Platform	Session Capacity (IOS-XE 16.12+)	Impact of sRTP to IPT	Encrypted Audio calls w/ GCM128	CPS
<small>¹CSR1Kv - Based on tests using Cisco UCS [®] C240 host with Intel [®] Xeon [*] 6132 2.60GHz processors running VMware ESXi 6.0.</small>	RTP(G711)-RTP(G711)		sRTP(G711)-RTP(G711)	
ASR1001-X (16 GB)	12000	80%	2400	13
ASR1002-X (16 GB)	14000	57%	6000	32
ASR1004/6/6-X RP2/ESP40 (16 GB)	16000	80%	3200	18

CUBE Encrypted IPT Session Capacity (IOS-XE 16.12+)

Platform	Session Capacity (IOS-XE 16.12+) RTP(G711)-RTP(G711)	Impact of sRTP to IPT	Encrypted Audio calls w/ GCM256 sRTP(G711)-RTP(G711)	CPS
1100 series (Default DRAM)	500	40%	300	2
4321 (4 GB)	500	40%	300	2
4331 (4 GB)	1000	40%	600	4
4351 (4 GB)	2000	62.5%	750	4
4431 (8 GB)	3000	75%	750	4
4451 (8 GB)	6000	65%	1080	6
4461 (8 GB)	10000 (17.2.1r)	46%	5400 (17.3.1)	30
C8200L-1N-4T (4 GB)	1500 (17.5.1)	67%	500 (17.5.1)	3
C8200-1N-4T (8 GB)	2500 (17.4.1)	68%	800 (17.4.1)	5
C8300-1N1S-6T (8 GB)	7000 (17.3.2)	74%	1800 (17.3.2)	10
C8300-2N2S-6T (8 GB)	7500 (17.3.2)	72%	2100 (17.3.2)	12
C8300-1N1S-4T2X (8 GB)	8000 (17.3.2)	71%	2300 (17.3.2)	13
C8300-2N2S-4T2X (16 GB)	10000 (17.3.2)	52%	4800 (17.3.2)	27
C8000V-S/CSR1Kv - 1 vCPU ¹ (4 GB)	1000	70%	300	1
C8000V-M/CSR1Kv - 2 vCPU ¹ (4 GB)	3000	67%	1000	6
C8000V-L/CSR1Kv - 4 vCPU ¹ (8 GB)	6000	82%	1080	6

CUBE Encrypted IPT Session Capacity (IOS-XE 16.12+)

Platform	Session Capacity (IOS-XE 16.12+)	Impact of sRTP to IPT	Encrypted Audio calls w/ GCM256	CPS
<small>¹CSR1Kv - Based on tests using Cisco UCS [®] C240 host with Intel [®] Xeon [*] 6132 2.60GHz processors running VMware ESXi 6.0.</small>	RTP(G711)-RTP(G711)		sRTP(G711)-RTP(G711)	
ASR1001-X (16 GB)	12000	83%	2000	10
ASR1002-X (16 GB)	14000	68%	4500	25
ASR1004/6/6-X RP2/ESP40 (16 GB)	16000	83%	2700	15

CUBE Encrypted IPT Session Capacity (IOS-XE 16.12+)

Platform	Session Capacity (IOS-XE 16.12+)	Impact of sRTP to IPT	Encrypted Audio calls SHA1_80 - GCM128 sRTP(G711) - sRTP(G711)	CPS
<small>1CSR1Kv - Based on tests using Cisco UCS ® C240 host with Intel ® Xeon ® 6132 2.60GHz processors running VMware ESXi 6.0.</small>	RTP(G711)-RTP(G711)			
1100 series (Default DRAM)	500	70%	150	1
4321 (4 GB)	500	70%	150	1
4331 (4 GB)	1000	70%	300	2
4351 (4 GB)	2000	81%	375	2
4431 (8 GB)	3000	87.5%	375	2
4451 (8 GB)	6000	91%	540	3
4461 (8 GB)	10000 (17.2.1r)	53%	4680 (17.3.1)	26
C8200L-1N-4T (4 GB)	1500 (17.5.1)	67%	250 (17.5.1)	2
C8200-1N-4T (8 GB)	2500 (17.4.1)	68%	450 (17.4.1)	3
C8300-1N1S-6T (8 GB)	7000 (17.3.2)	85%	1000 (17.3.2)	6
C8300-2N2S-6T (8 GB)	7500 (17.3.2)	87%	1000 (17.3.2)	6
C8300-1N1S-4T2X (8 GB)	8000 (17.3.2)	85%	1200 (17.3.2)	7
C8300-2N2S-4T2X (16 GB)	10000 (17.3.2)	75%	2500 (17.3.2)	14
C8000V-S/CSR1Kv - 1 vCPU ¹ (4 GB)	1000	85%	150	1
C8000V-M/CSR1Kv - 2 vCPU ¹ (4 GB)	3000	83.3%	500	3
C8000V-L/CSR1Kv - 4 vCPU ¹ (8 GB)	6000	91%	540	3

CUBE Encrypted IPT Session Capacity (IOS-XE 16.12+)

Platform <small>¹CSR1Kv - Based on tests using Cisco UCS [®] C240 host with Intel [®] Xeon [*] 6132 2.60GHz processors running VMware ESXi 6.0.</small>	Session Capacity (IOS-XE 16.12+) RTP(G711)-RTP(G711)	Impact of sRTP to IPT	Encrypted Audio calls SHA1_80 - GCM128 sRTP(G711) - sRTP(G711)	CPS
ASR1001-X (16 GB)	12000	92%	1000	6
ASR1002-X (16 GB)	14000	79%	3000	16
ASR1004/6/6-X RP2/ESP40 (16 GB)	16000	91%	1500	9

CUBE Encrypted IPT Session Capacity (IOS-XE 16.12+)

Platform	Session Capacity (IOS-XE 16.12+)	Impact of sRTP to IPT	Encrypted Audio calls SHA1_80 - GCM256 sRTP(G711) - sRTP(G711)	CPS
<small>1 CSR1Kv - Based on tests using Cisco UCS ® C240 host with Intel ® Xeon ® 6132 2.60GHz processors running VMware ESXi 6.0.</small>	RTP(G711)-RTP(G711)			
1100 series (Default DRAM)	500	70%	150	1
4321 (4 GB)	500	70%	150	1
4331 (4 GB)	1000	70%	300	2
4351 (4 GB)	2000	81%	375	2
4431 (8 GB)	3000	87.5%	375	2
4451 (8 GB)	6000	91%	540	3
4461 (8 GB)	10000 (17.2.1r)	53%	4680 (17.3.1)	26
C8200L-1N-4T (4 GB)	1500 (17.5.1)	67%	250 (17.5.1)	2
C8200-1N-4T (8 GB)	2500 (17.4.1)	68%	450 (17.4.1)	3
C8300-1N1S-6T (8 GB)	7000 (17.3.2)	85%	1000 (17.3.2)	6
C8300-2N2S-6T (8 GB)	7500 (17.3.2)	87%	1000 (17.3.2)	6
C8300-1N1S-4T2X (8 GB)	8000 (17.3.2)	85%	1200 (17.3.2)	7
C8300-2N2S-4T2X (16 GB)	10000 (17.3.2)	75%	2500 (17.3.2)	14
C8000V-S/CSR1Kv - 1 vCPU ¹ (4 GB)	1000	85%	150	1
C8000V-M/CSR1Kv - 2 vCPU ¹ (4 GB)	3000	83.3%	500	3
C8000V-L/CSR1Kv - 4 vCPU ¹ (8 GB)	6000	91%	540	3

CUBE Encrypted IPT Session Capacity (IOS-XE 16.12+)

Platform	Session Capacity (IOS-XE 16.12+)	Impact of sRTP to IPT	Encrypted Audio calls SHA1_80 - GCM256 sRTP(G711) - sRTP(G711)	CPS
<small>¹CSR1Kv - Based on tests using Cisco UCS [®] C240 host with Intel [®] Xeon [*] 6132 2.60GHz processors running VMware ESXi 6.0.</small>	RTP(G711)-RTP(G711)			
ASR1001-X (16 GB)	12000	92%	1000	5
ASR1002-X (16 GB)	14000	82%	2500	14
ASR1004/6/6-X RP2/ESP40 (16 GB)	16000	91%	1500	8

CUBE Encrypted IPT Session Capacity (IOS-XE 16.12+)

Platform	Session Capacity (IOS-XE 17.2.1r) RTP(G711)-RTP(G711)	Impact of sRTP to IPT	Encrypted Audio GCM128 - GCM128 GCM128 - GCM256 GCM256 - GCM256 sRTP(G711) - sRTP(G711)	CPS
4461 (8 GB)	10000 (17.2.1r)	73%	2700 (17.3.1)	15
C8300-1N1S-6T (8 GB)	7000 (17.3.2)	85%	900 (17.3.2)	5
C8300-2N2S-6T (8 GB)	7500 (17.3.2)	87%	1050 (17.3.2)	6
C8300-1N1S-4T2X (8 GB)	8000 (17.3.2)	85%	1150 (17.3.2)	7
C8300-2N2S-4T2X (16 GB)	10000 (17.3.2)	75%	2400 (17.3.2)	14

Collab Calls - Encrypted Video Calls

SRTP-RTP

SRTP-SRTP

CUBE Encrypted Video Session Capacity

[H.264 QCIF (15 FPS, 64 kbps)] - (IOS-XE 16.12+)

Platform	Encrypted video calls w/ SHA1_80 sRTP(G711)-RTP(G711)	CPS	Encrypted video calls w/ GCM128 sRTP(G711)-RTP(G711)	CPS
1100 series (Default DRAM)	100	1	50	1
4321 (4 GB)	100	1	50	1
4331 (4 GB)	180	1	100	1
4351 (4 GB)	180	1	120	1
4431 (8 GB)	180	1	100	1
4451 (8 GB)	540	3	180	1
C8200L-1N-4T (4 GB)	130	1	80	1
C8200-1N-4T (8 GB)	220	2	180	1
C8000V-S/CSR1Kv - 1 vCPU ¹ (4 GB)	180	1	180	1
C8000V-M/CSR1Kv - 2 vCPU ¹ (4 GB)	180	1	540	1
C8000V-L/CSR1Kv - 4 vCPU ¹ (8 GB)	540	3	540	3
ASR1001-X (16 GB)	900	5	360	2
ASR1002-X (16 GB)	2300	13	900	5
ASR1004/6/6-X RP2/ESP40	1250	7	540	3

¹CSR1Kv - Based on tests using Cisco UCS[®] C240 host with Intel[®] Xeon[®] 6132 2.60GHz processors running VMware ESXi 6.0.

CUBE Encrypted Video Session Capacity

[H.264 QCIF (15 FPS, 64 kbps)] - (IOS-XE 16.12+)

Platform	Encrypted video calls w/ GCM256 sRTP(G711)-RTP(G711)	CPS	Encrypted Video calls SHA1_80 - GCM128 sRTP(G711) - sRTP(G711)	CPS
1100 series (Default DRAM)	50	1	50	1
4321 (4 GB)	50	1	50	1
4331 (4 GB)	100	1	100	1
4351 (4 GB)	110	1	130	1
4431 (8 GB)	100	1	115	1
4451 (8 GB)	180	1	180	1
C8200L-1N-4T (4 GB)	80	1	80	1
C8200-1N-4T (8 GB)	140	1	140	1
C8000V-S/CSR1Kv - 1 vCPU ¹ (4 GB)	180	1	180	1
C8000V-M/CSR1Kv - 2 vCPU ¹ (4 GB)	180	1	180	1
C8000V-L/CSR1Kv - 4 vCPU ¹ (8 GB)	540	3	180	1
ASR1001-X (16 GB)	360	2	360	2
ASR1002-X (16 GB)	900	5	900	5
ASR1004/6/6-X RP2/ESP40	540	3	540	3

¹CSR1Kv - Based on tests using Cisco UCS[®] C240 host with Intel[®] Xeon[®] 6132 2.60GHz processors running VMware ESXi 6.0.

CUBE Encrypted Video Session Capacity

[H.264 QCIF (15 FPS, 64 kbps)] - (IOS-XE 16.12+)

Platform <small>¹CSR1Kv - Based on tests using Cisco UCS[®] C240 host with Intel[®] Xeon[®] 6132 2.60GHz processors running VMware ESXi 6.0.</small>	Encrypted Video calls SHA1_80 - GCM256 sRTP(G711) - sRTP(G711)	CPS
1100 series (Default DRAM)	50	1
4321 (4 GB)	50	1
4331 (4 GB)	100	1
4351 (4 GB)	130	1
4431 (8 GB)	115	1
4451 (8 GB)	180	1
C8200L-1N-4T (4 GB)	80	1
C8200-1N-4T (8 GB)	140	1
C8000V-S/CSR1Kv - 1 vCPU ¹ (4 GB)	180	1
C8000V-M/CSR1Kv - 2 vCPU ¹ (4 GB)	180	1
C8000V-L/CSR1Kv - 4 vCPU ¹ (8 GB)	180	1
ASR1001-X (16 GB)	360	2
ASR1002-X (16 GB)	900	5
ASR1004/6/6-X RP2/ESP40	540	3


Contact Center Calls (UCCE/PCCE)

CUBE Session Capacity for UCCE (IOS-XE 16.12+)

Platform <small>CSR1Kv - Based on tests using Cisco UCS * C240 host with Intel * Xeon * 6132 2.60GHz processors running VMware ESXi 6.0.</small>	Session Capacity (IOS-XE 16.12+) RTP(G711)-RTP(G711)	UCCE Capacity (Prior to IOS-XE 16.12)	UCCE Call Capacity RTP(G711)-RTP(G711) (IOS-XE 16.12+)	Impact of UCCE to IPT (Collab)	UCCE CPS
1100 series (Default DRAM)*	500	N/A	500	0%	5
4321 (4 GB)	500	125	500	0%	3
4331 (4 GB)	1000	250	1000	0%	7
4351 (4 GB)	2000	500	1500	25%	8
4431 (8 GB)	3000	750	1800	40%	10
4451 (8 GB)	6000	1500	3600	40%	20
4461 (8 GB)	10000 (17.2.1r)	N/A	4680 (17.2.1r)	53%	26
C8200L-1N-4T (4 GB)*	1500 (IOS-XE 17.5.1+)	N/A	1000	33%	6
C8200-1N-4T (8 GB)*	2500 (IOS-XE 17.4.1a+)	N/A	1400	44%	8
C8300-1N1S-6T (8 GB)*	7000 (17.3.2)	N/A	3200 (17.3.2)	54%	18
C8300-2N2S-6T (8 GB)*	7500 (17.3.2)	N/A	3700 (17.3.2)	51%	21
C8300-1N1S-4T2X (8 GB)*	8000 (17.3.2)	N/A	3800 (17.3.2)	52.5%	21
C8300-2N2S-4T2X (16 GB)*	10000 (17.3.2)	N/A	4100 (17.3.2)	59%	23

* Check [Contact Center Enterprise Solution Compatibility matrix](#) for **supported** CUBE platforms and software releases.

CUBE Session Capacity for UCCE (IOS-XE 16.12+)

Platform <small>¹CSR1Kv - Based on tests using Cisco UCS * C240 host with Intel * Xeon * 6132 2.60GHz processors running VMware ESXi 6.0.</small>	Session Capacity (IOS-XE 16.12+) RTP(G711)-RTP(G711)	UCCE Capacity (Prior to IOS-XE 16.12)	UCCE Call Capacity RTP(G711)-RTP(G711) (IOS-XE 16.12+)	Impact of UCCE to IPT (Collab)	UCCE CPS
C8000V-S/CSR1Kv - 1 vCPU ¹ (4 GB)	1000	250	 500	50%	3
C8000V-M/CSR1Kv - 2 vCPU ¹ (4 GB)	3000	750	3000	0%	20
C8000V-L/CSR1Kv - 4 vCPU ¹ (8 GB)	6000	1500	4250	29%	24
ASR1001-X (16 GB)	12000	3000	4250	65%	24
ASR1002-X (16 GB)	14000	3500	4250	70%	24
ASR1004/6/6-X RP2/ESP40 (16 GB)	16000	4000	4500	72%	25

Sample ISR4K CUBE Sizing

• An enterprise is considering a 4451-X for their collab deployment with the following requirements:

- 500 Unencrypted IPT calls
- 100 Contact Center (CC) calls
- Record all CC calls = 100 IPT Calls
- 50 SRTP-RTP audio calls with SHA1-80
- 100 SRTP-SRTP audio calls

$$\begin{aligned}
 & 500 \text{ Unencrypted IPT calls} * 1.00 = \mathbf{500} \\
 & + 100 \text{ Contact Center calls} * 1.67 = \mathbf{167} \\
 & + \text{Record all CC calls} = 100 \text{ IPT Calls} * 1.00 = \mathbf{100} \\
 & + 50 \text{ SRTP-RTP audio calls with SHA1-80} * 2.86 = \mathbf{143} \\
 & + 100 \text{ SRTP-SRTP audio calls} * 11.11 = \mathbf{1111}
 \end{aligned}$$

TOTAL Capacity in terms of IPT count = 2021

**TOTAL CUBE Trunk
Session Licenses
Required in this setup:
 $500+100+50+100 = 750$**

4451 6000 IPT Calls	Ratio to IPT calls	%age IMPACT
IPT Calls	1	N/A
UCCE	1.67	40%
Recorded legs	1.0	50%
SRTP-RTP	2.86	65%
SRTP-SRTP	11.11	91%

4451-X



CUBE Media Proxy Capacities

Media Proxy: Capacity for Various Platforms (IOS-XE 16.12+)

Platform	Max IPT Calls	(Media Proxy Capacity CUCM NBR) <u>Number of Recorders</u>				
		<u>One</u>	<u>Two</u>	<u>Three</u>	<u>Four</u>	<u>Five</u>
1100 (Default DRAM) / 4321 (4GB)	500			350		
4331 (4GB)	1000			700		
4351 (4 GB)	2000			900		
4431 (8 GB - CP)	3000			1000		
4451 (8 GB - CP)	6000			3000		
4461 (8 GB - CP) [IOS 17.2.1]	10000			4000		
C8000V-S/CSR1Kv - 1 vCPU ¹ (4 GB)	1000			90		
C8000V-M/CSR1Kv - 2 vCPU ¹ (4 GB)	3000			1100		
C8200L-1N-4T (17.5.1+) (4 GB)	1500			600		
C8200-1N-4T (8 GB) (17.4.1a)	2500			1000		
C8300-1N1S-6T (8 GB) (17.3.2)	7000			3000		
C8300-2N2S-6T (8 GB) (17.3.2)	7500			3400		
C8300-1N1S-4T2X (8 GB) (17.3.2)	8000			3400		
C8300-2N2S-4T2X (16 GB) (17.3.2)	10000			3600		

Media Proxy: Capacity for Various Platforms (IOS-XE 16.12+)

Platform	Max IPT Calls	(Media Proxy Capacity CUCM NBR) <u>Number of Recorders</u>				
		<u>One</u>	<u>Two</u>	<u>Three</u>	<u>Four</u>	<u>Five</u>
ASR 1002-X (16 GB)	14000			4500		
ASR 1004/6/6-X RP2/ESP40 (16 GB)	16000			4500		

Media Proxy: Capacity for Various Platforms (IOS-XE 16.12+)

Platform	Max IPT Calls	(Media Proxy Capacity SIPREC) <u>Number of Recorders</u>				
		<u>One</u>	<u>Two</u>	<u>Three</u>	<u>Four</u>	<u>Five</u>
4321 (4GB)	500			180		90
4331 (4GB)	1000			550		350
4351 (4 GB)	2000			650		350
4431 (8 GB - CP)	3000			750		550
4451 (8 GB - CP)	6000			1900		900
4461 (8 GB - CP) [IOS 17.2.1]	10000			3600		1950
C8200L-1N-4T (4 GB) (17.5.1+)	1500			450		300
C8200-1N-4T (8 GB) (17.4.1a)	2500			750		600
C8300-1N1S-6T (8 GB) (17.3.2)	7000			2100		1300
C8300-2N2S-6T (8 GB) (17.3.2)	7500			2100		1300
C8300-1N1S-4T2X (8 GB) (17.3.2)	8000			2700		1600
C8300-2N2S-4T2X (16 GB) (17.3.2)	10000			3900		1950
ASR 1001-X/1002-X (16 GB)	14000			4000		2800
ASR 1004/6/6-X RP2/ESP40 (16 GB)	16000			4000		3200
ASR 1006-X RP3/ESP100 (16 GB)	16000			3400		3000

